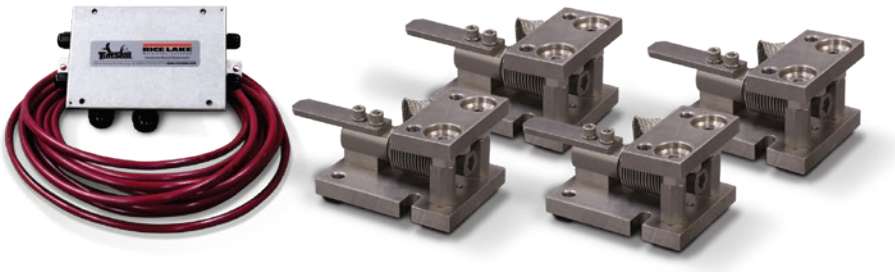

Picture is a representation of actual product.

Order Information

Load Rating (Per Module)	Part #	Price
Single Module (Includes Load Cell)		
5 kg	**32687**	Consult
10 kg	**32688**	Consult
20 kg	**32689**	Consult
50 kg	**32690**	Consult
100 kg	**32691**	Consult
200 kg	**32692**	Consult
250 kg	**32693**	Consult
500 kg	**32974**	Consult
1,000 kg	**32973**	Consult
2,000 kg	**32972**	Consult
5,000 kg	**32971**	Consult
3-Module Kit		
5 kg	**32920**	Consult
10 kg	**32921**	Consult
20 kg	**32922**	Consult
50 kg	**32923**	Consult
100 kg	**32924**	Consult
200 kg	**32925**	Consult
250 kg	**32926**	Consult
500 kg	**32980**	Consult
1,000 kg	**32981**	Consult
2,000 kg	**32982**	Consult
5,000 kg	**32983**	Consult
4-Module Kit		
5 kg	**32927**	Consult
10 kg	**32928**	Consult
20 kg	**32929**	Consult
50 kg	**32930**	Consult
100 kg	**32931**	Consult
200 kg	**32932**	Consult
250 kg	**32933**	Consult
500 kg	**32984**	Consult
1,000 kg	**32985**	Consult
2,000 kg	**32986**	Consult
5,000 kg	**32987**	Consult

Dimensions

Rated Capacity	C	B	*H1	**H2	L	L1	L2	L3	L4	L5	W	W1	W2	W3
kg/mm														
5 to 250	13.1	1/2-20 UNF	80.0	86.1	131.8	63.8	76.0	42.0	56.0	14.1	101.4	70.0	15.5	25.4
500 to 2,000	13.1	5/8-18 UNF	101.6	109.4	165.1	71.2	129.5	15.5	75.5	60.0	110.0	70.0	20.0	31.8
5,000	19.8	3/4-10 UNC	135.0	143.0	215.0	81.0	161.0	20.0	90.0	70.0	150.0	90.0	30.0	40.0

** In weighing position ** In jacked-up position for load cell shipping or removal*

Complete Kit Includes

- Three or four RL1700 HE stainless steel compression mounts with NTEP Certified RL9018SS (5 to 250 kg) or RLHTO (500 to 5,000 kg) stainless steel, hermetically sealed single-ended beam load cells
- One JB4SS NEMA Type 4X stainless steel signal-trim junction box
- 25 ft of our hostile environment EL147HE SURVIVOR load cell cable

Standard Features

- Capacities (per module) 5 to 5,000 kg
- All stainless steel, weldless construction retains less residue and allows fast, thorough cleaning
- Bolt-in-place design; module bolts directly to tank leg without requiring additional load buttons or mounting plates
- Self-checking with lift-off/tip-over protection and jacking/shipping bolts
- Load cell is isolated from overload in all directions

Applications

- Multi-ingredient micro-batching
- Meat and poultry processing
- Batching/blending
- Dye/ink blending

Load Cell Approvals



5 kg - 250 kg capacities

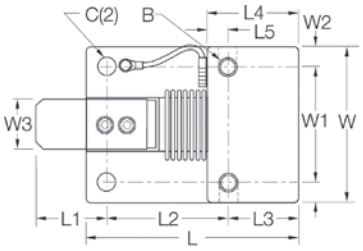

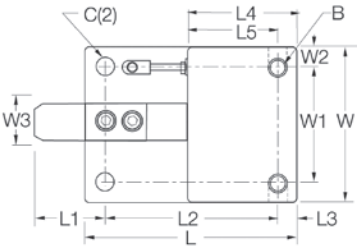

500 kg - 5000 kg capacities

SURVIVOR® WEIGH MODULES